


KWC ZOE Touch Light PRO

KWC

Swiss Water Experience

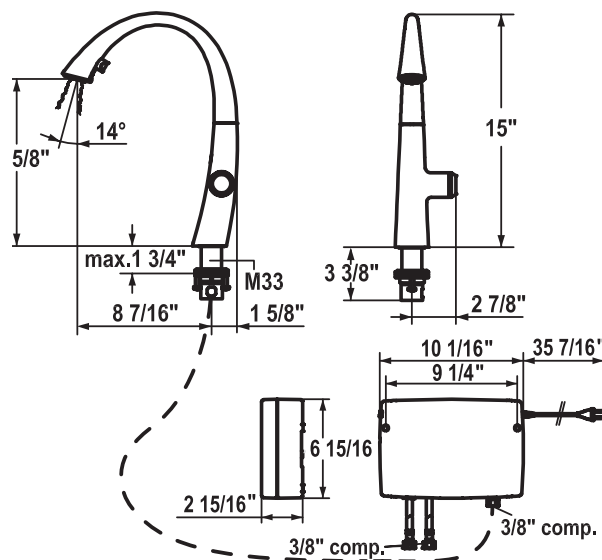

KWC-No.

Finish

10.201.242.127

splendure™ stainless steel

8 7/16" spout length

Kitchen

Pull-Down Faucet with luminaqua® LED-Technology, Touch Light PRO

Covered pull-out spray

- ergonomic shape and spout alignment for ease of handling
- KWC jetclean™ technology
- Caché® adjustable aerator
- automatic diverter reset
- integrated ON/OFF push-button with automatic shut-off after 30 minutes
- pull-out length up to 19 1/16"
- hose surface to fit faucet surface
- hose guide secures hose back in place
- swivel range 270°

Touch light PRO control unit, maintenance-free

- up-to-date microprocessor and drive technology
- tried-and-tested valve technology
- includes installation materials
- designed for wired connection to 1 operating unit (standard)

Flexible connection hoses 3/8" compression

M33 x 1.5 threaded sleeve fastening

Mounting hole size ø1 3/8"

Includes:

- plug power supply 100-240 V / operating voltage 15 V / cable length 35 7/16"

To be ordered separately (optional or if necessary):

- extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material

Flow rate max 1.75 gpm (60 psi)

Flow rate needle spray max 1.75 gpm (60 psi)

Catalog page 18

Electronic controlled

- touch light PRO technology

Touch'n'flow 1-2-3

- touch'n'flow 1: cold water, flow rate can be individually adjusted and saved
- touch'n'flow 2: warm water, flow rate can be individually adjusted and saved
- touch'n'flow 3: hot water, flow rate can be individually adjusted and saved

3 preset temperatures and flow rates

- adjustable temperature
- adjustable volume all in one handle

Position of control unit only possible on the right side

Space between wall and mounting hole minimum of 1 5/8"

Microprocessor-control

- cleaning program
- duration of water flow - safety indication: switch off automatically after 10 minutes
- adjustable temperature limit
- hot water disinfection (5 minutes) can be adjusted
- restore back to factory settings