
## **KWC ONO Touch Light PRO**





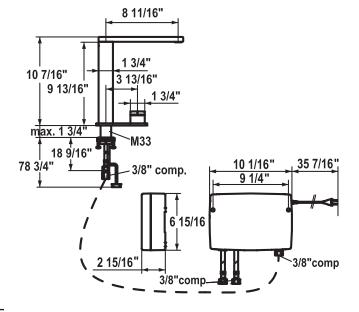

KWC-No.

Finish chrome

## 10.651.022.000

8<sup>1</sup>/<sub>16</sub>" spout length

## Kitchen Swivel Spout Faucet with LED-Technology

Electronic controlled

touch light PRO technology

Touch'n'flow 1-2-3

- touch'n'flow 1: cold water, flow rate can be individually adjusted and saved
- touch'n'flow 2: warm water, flow rate can be individually adjusted and saved
- touch'n'flow 3: hot water, flow rate can be individually adjusted and saved

3 preset temperatures and flow rates

- adjustable temperature
  - adjustable volume all in one handle
- Microprocessor-control
  - cleaning program
  - adjustable temperature limit
  - hot water disinfection (5 minutes) can be adjusted
  - restore back to factory settings
  - built in safety controls, water automatically turns off after 10 minutes

Swivel spout 360°

- Caché<sup>®</sup> hidden aerator
- Touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - includes installation materials
  - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)

Flexible connection hoses 3/8" compression

M33 x 1.5 threaded sleeve fastening Mounting hole size  $\emptyset$ 1 %"

## Includes:

- plug power supply 100-240 V / operating voltage 15 V / cable length 35 7/6"
- control unit and wired operating unit / cable length 78 ¾" To be ordered separately (optional or if necessary):
  - extension set 1500 mm Z.536.352, comprising: stainless steel
    - hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
    - KWC ONO touch light PRO wireless operating unit
    - Z.536.638.000

For comprehensive information on planning, installation and operation contact your KWC dealer.

Flow rate max 1.75 gpm (60 psi)

Catalog page 28